




## Chapter 3: The Sail

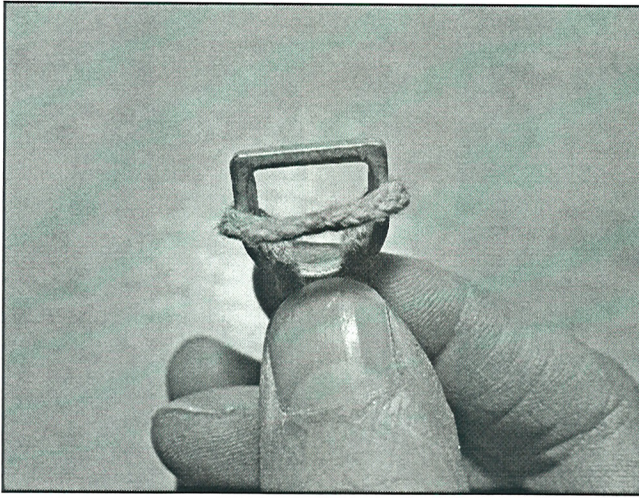


Step 2.

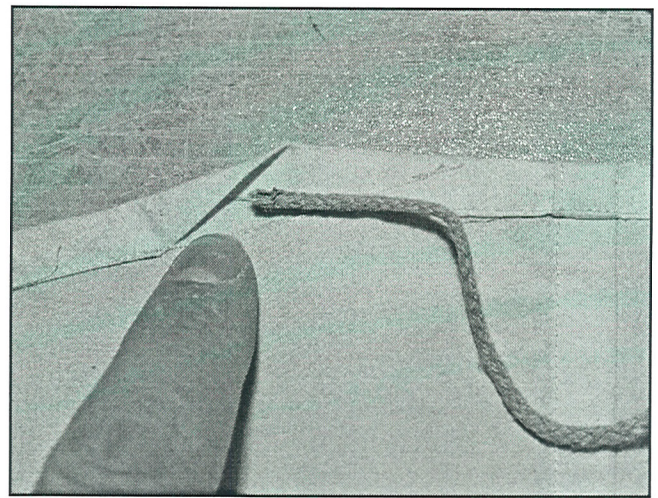


Start on the top corner.  
One end of the cord to the left side, the other to the right side.

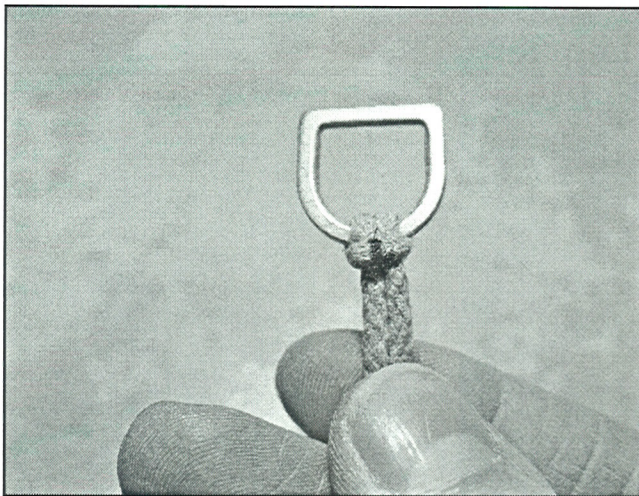


Step 3.

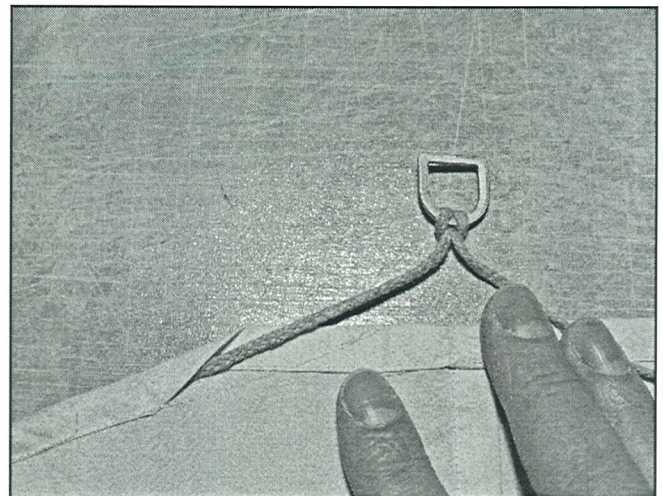

View on the top corner.

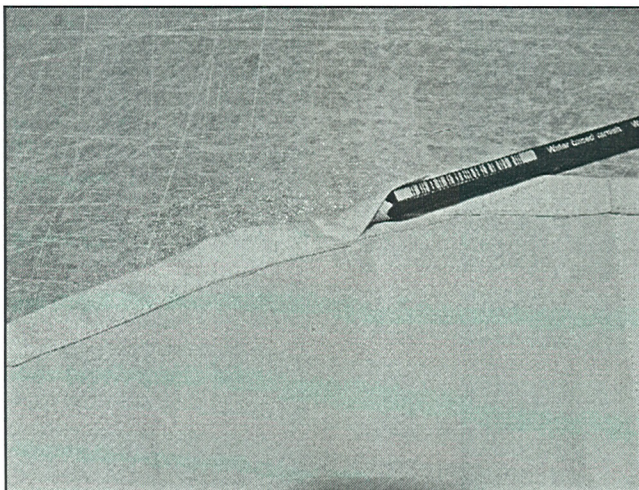


Use the hemstitch to put the hemp cord in.

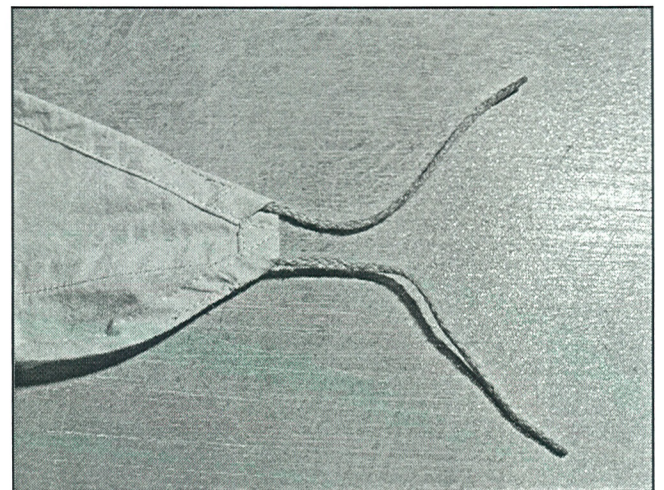


View on the bottom corner.





## Chapter 3: The Sail

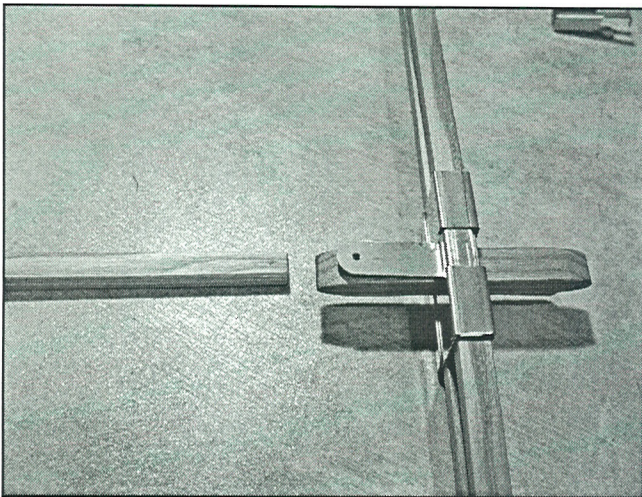


Complete the frame.

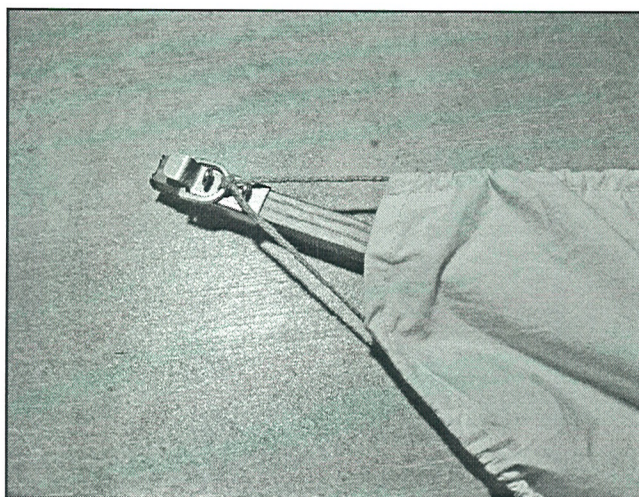

Knot in a D-ring at the left corner and at the right corner.

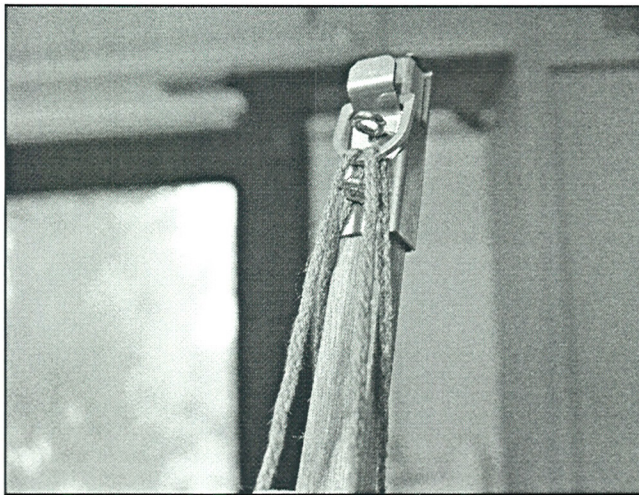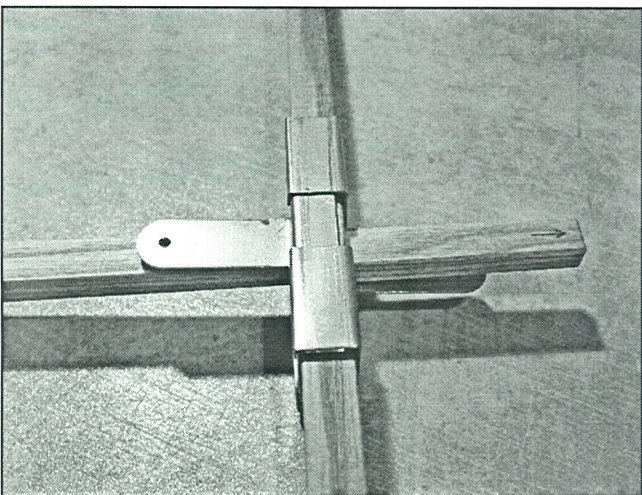

Put the two ends of the cord through the D-ring at the bottom of the kite.

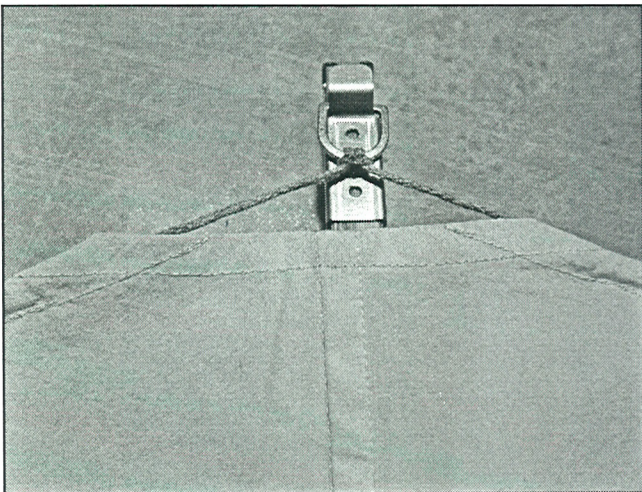


Hang the sail on the frame.  
Start with the top of the sail.




Take care that both ends are on the same length.




## Chapter 3: The Sail

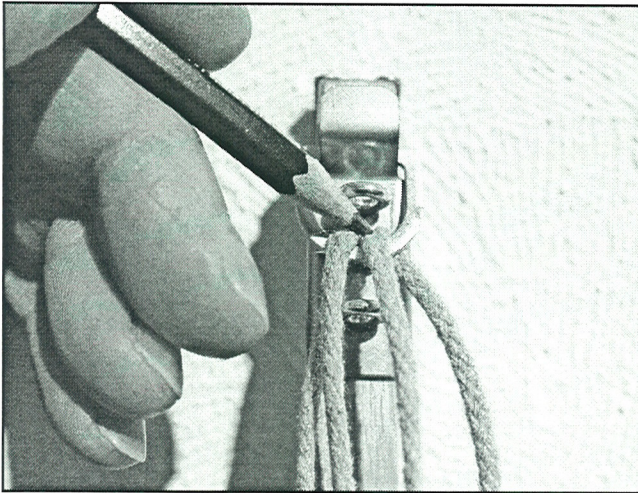

Tighten the cords and make a mark.

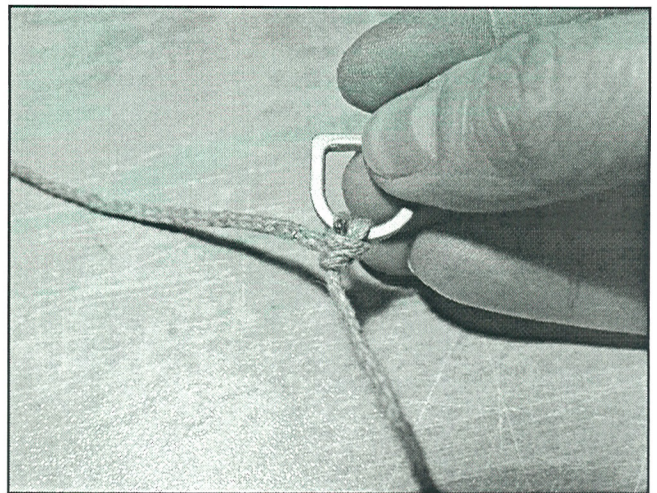

Finished.

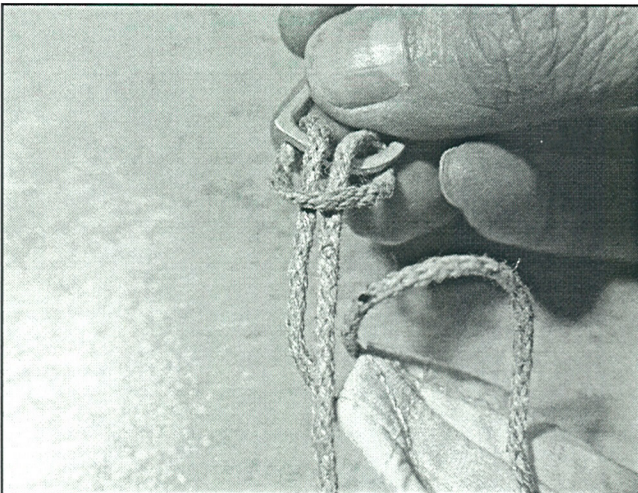


Make a knot like this.



Both ends of the cord are fixed now.



Pay attention at the mark.  
Fix the end with a second knot.

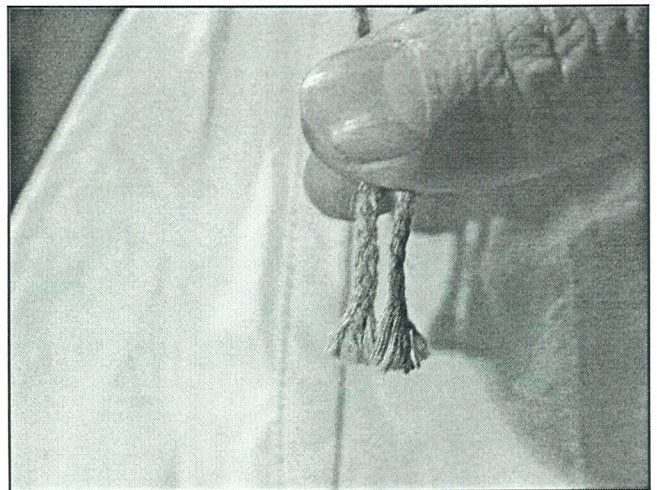

Control the ends again.




## Chapter 3: The Sail

Adjust the right knot and the left knot with a distance of 103cm to the knot at the top corner.



**Pay attention that the two main rods are at a right angle.**

Place the ring-screws to attach the middle connector to the vertical rod.


See drawing no. 6.

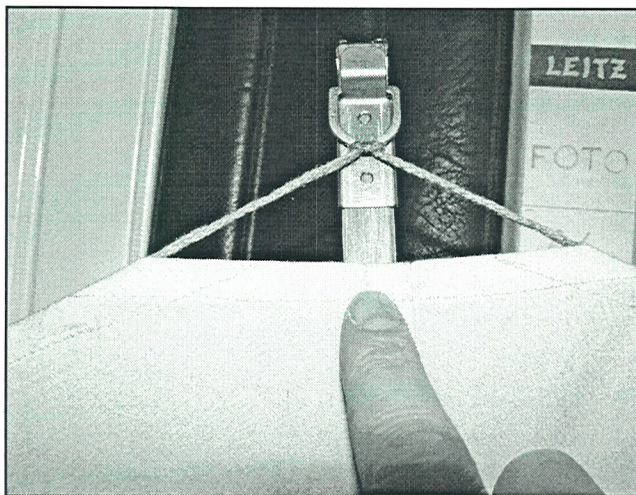

Take care that the middle seam is in the middle of the vertical rod.

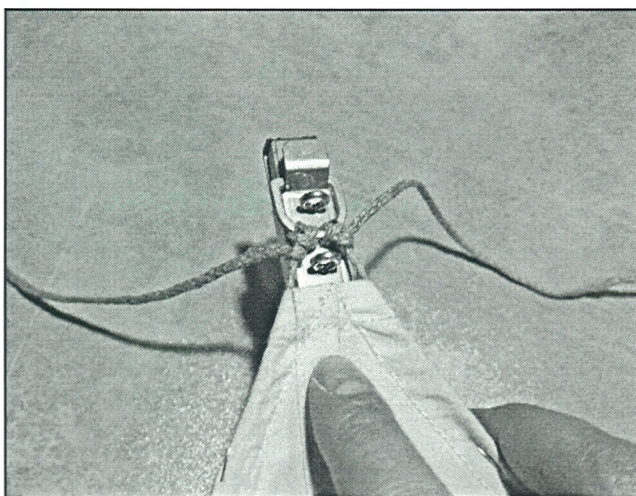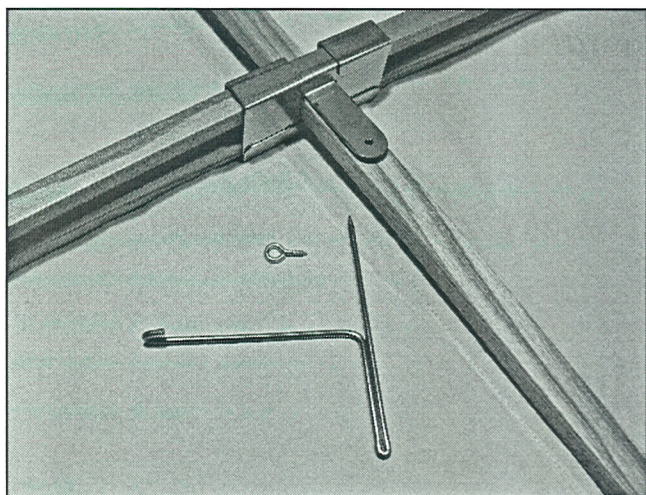

Same on the bottom corner.

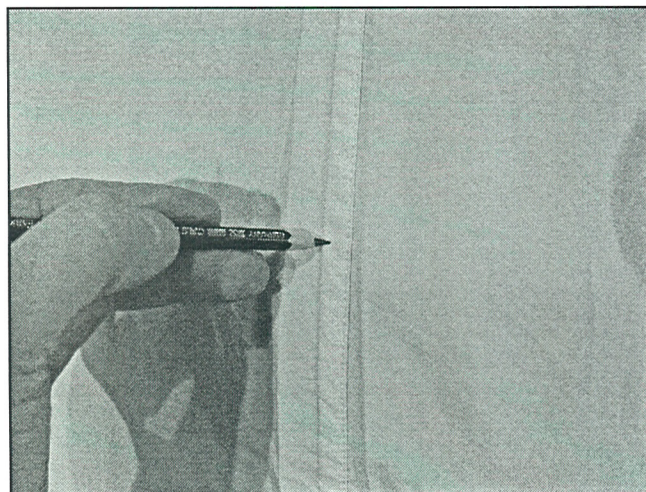

Place a mark on the front side of the sail on the cross point of the rods.


Adjust the sail on the frame.

Take care that you do not have folds on the outside hems.


Use needles to fix the cloth on the cord at every open end of the hems.




## Chapter 3: The Sail

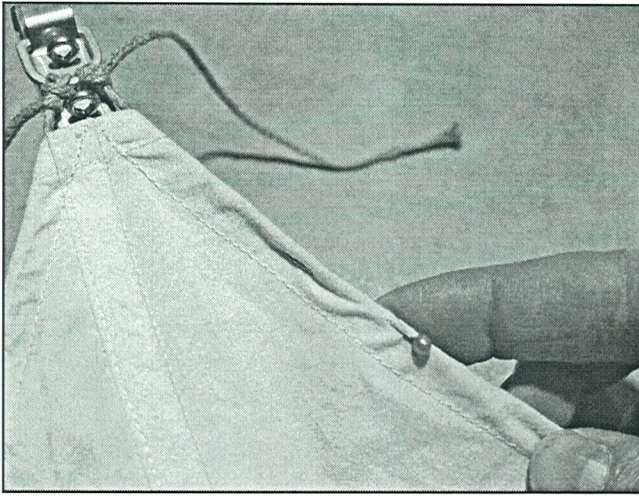


View at the bottom corner.

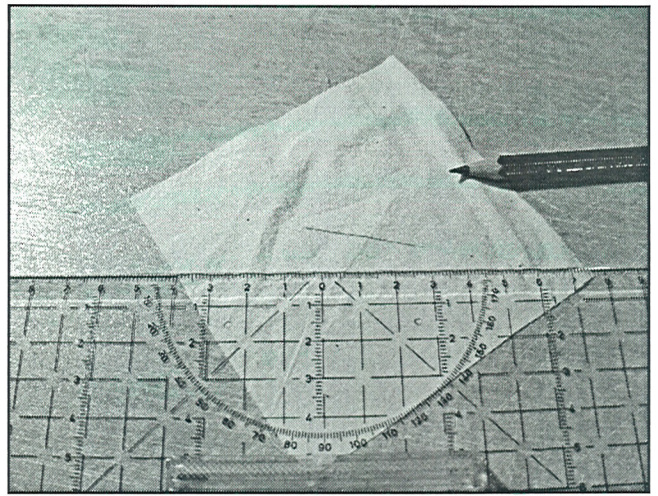


Cut off a square piece of cloth.  
See drawing no.4 + 5 for the dimensions.

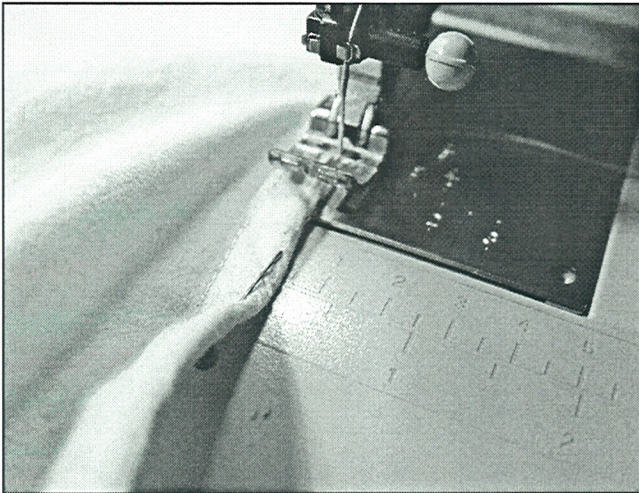


Fix the cloth and the hem with a seam of 3cm.

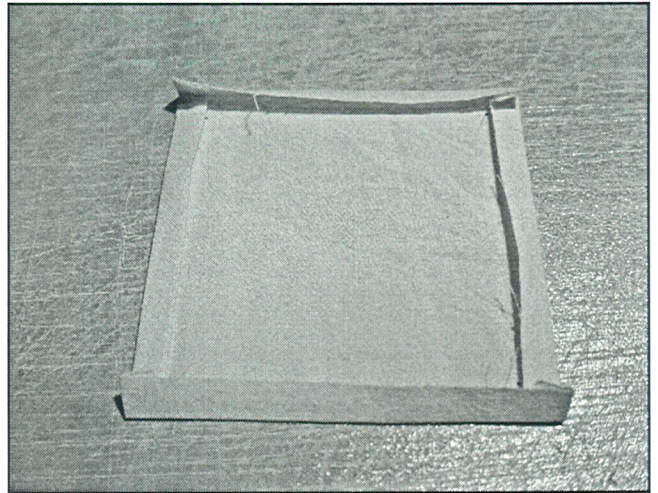

Fold the edges to the reverse side.  
Use the iron for fixing.

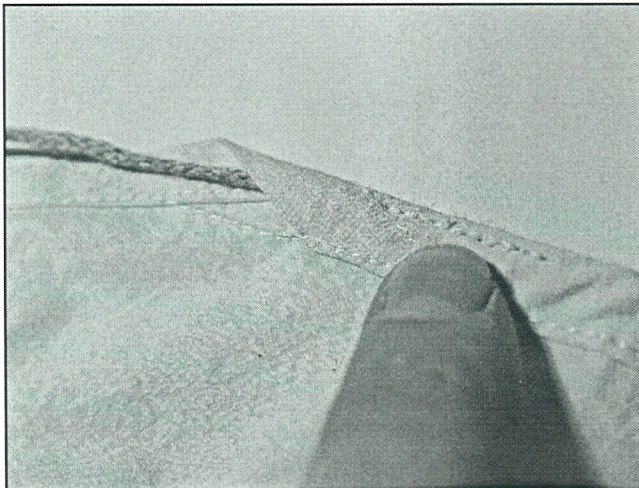


Finished.

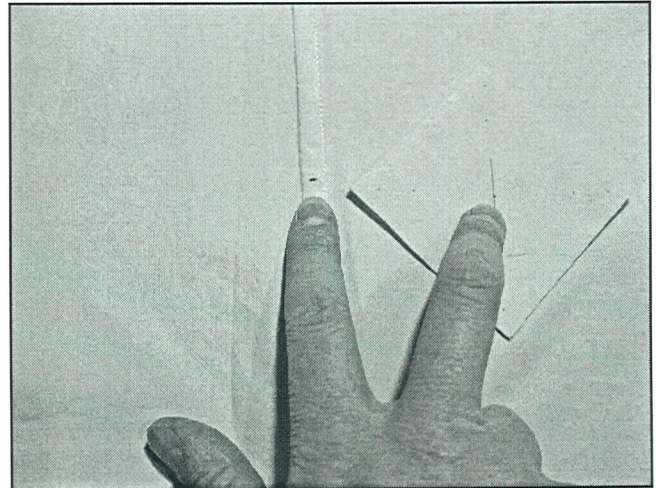


Place the reinforcement on the mark in the middle of the sail.




## Chapter 3: The Sail

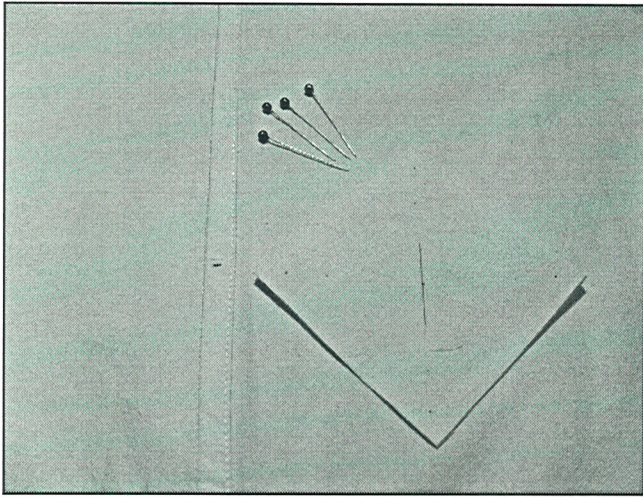


Use neddles to fix the reinforcement.

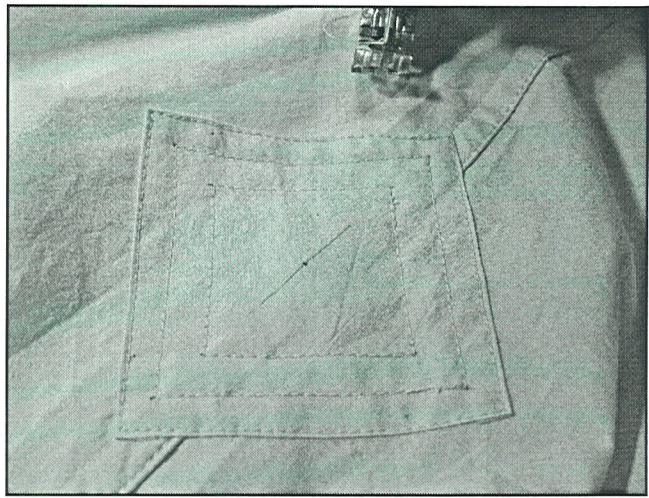


Make the second and the third seam.  
Pay attention on the drawing no. 5.

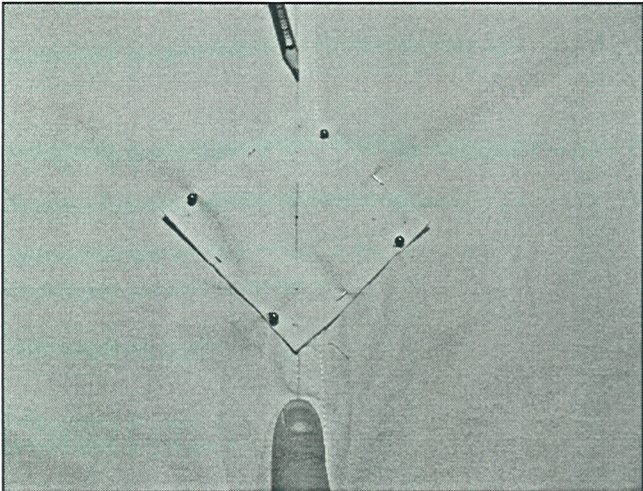


Top and bottom corner of the reinforcement need to match the left seam.

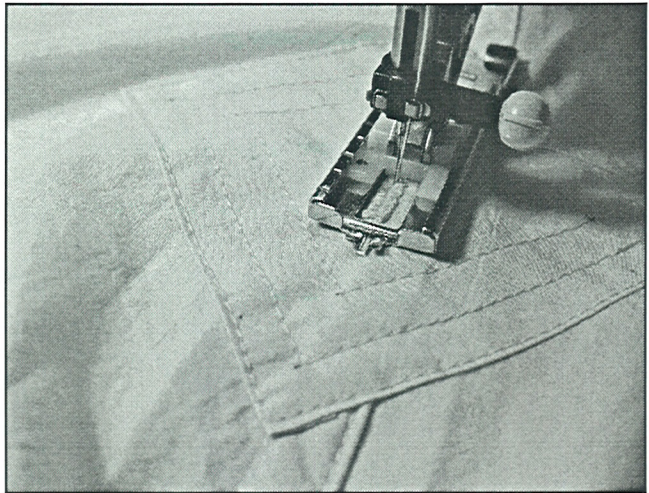

Sew a button hole.

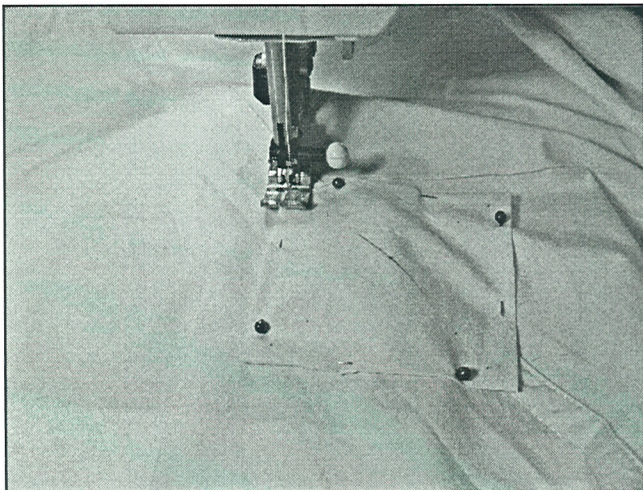

Sew at first on the edge of the reinforcement.

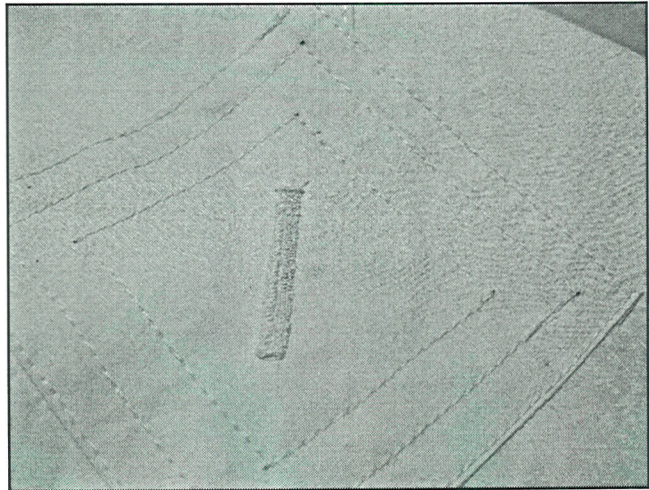

Sewing is finished now.